
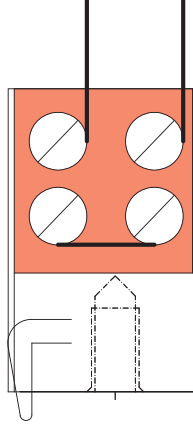


GACHE ELECTRIQUE ROUREG™ MINI
 ELECTRIC STRIKE ROUREG™ MINI
 ROUREG™ ELEKTRO-TÜRÖFFNER MINI
 ROUREG™ DEUROPENER MINI

SEM3R

ST_SEM3R_A_091201

RACCORDEMENT
 CONNECTING
 ANSCHLUBPLAN
 AANSLUITING

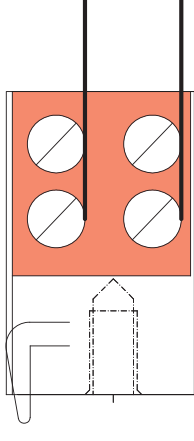

● de série / standard execution / Standardausführung / standard uitvoering
 — non disponible / not available / nicht verfügbar / niet beschikbaar

	h x l x p H x L x D H x B x T H x B x D					CE	
	61,8 x 15,8 x 25,5 mm	0,1 kg	300° C	350 DaN			
3 ROUREG MINI							
ROUGE RED ROT ROOD							
A RUPTURE - FAIL SAFE - RUHESTROM - RUSTSTROOM							
MODELE MODEL MODELL					RACCORDEMENT CONNECTING ANSCHLUBPLAN AANSLUITING		
SEM3R	—	—			1	10,2 - 13,8 V DC	200 mA
					2	20,4 - 27,6 V DC	100 mA
DEVERROUILLAGE IMMEDIATE SOUS PRESSION JUSQU'À : IMMEDIATE UNLOCKING UNDER LOAD UP TO : TÜRÖFFNUNG BEI EINER LAST VON BIS ZU: ONTGRENDELING ONDER DRUK VAN :							
						DC = 3 DaN	AC = 12 DaN

